


Universal Load Cell

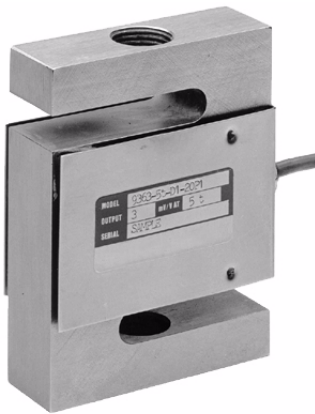

FEATURES

- Capacities 50 to 10000kg (50 to 20Klb)
- Nickel plated steel construction
- Certified to NTEP class III 3000d and class IIIIL 10000d
- Suitable for compression and tension applications
- Trimmed output versions available
- Sealing: IP65

OPTIONAL FEATURE

- FM approved for use in potentially explosive atmosphere

DESCRIPTION

The 363 is a multipurpose nickel plated S-Type load cell which can be used in tension or compression.


This product is suitable for a wide range of hybrid scales, overhead track scales, belt scales and process weighing applications.

Reliable sealing is ensured by the proprietary TRANSEAL potting compound and additional mechanical protection of the strain gauge area.

APPLICATIONS

- Suspended hoppers
- Overhead track scales
- Force measurement

OUTLINE DIMENSIONS in millimeters

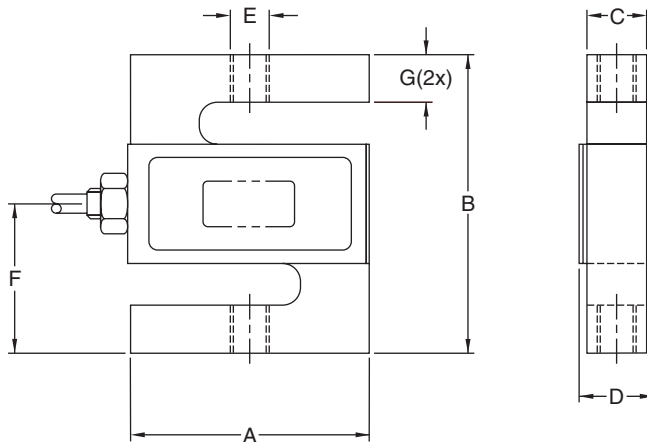

Cable specifications:

Cable length: 6m

- Excitation + Red
- Excitation - Black
- Output + Green
- Output - White
- Shield Transparent

Cable screen is not connected to load cell body

Cap (kg)	50, 100	250, 500	1000	2500	5000	7500	10000
Cap (lbs)	100, 200, 300	500 - 1.5K	2K, 2.5K	3K*, 5K	10K	15000	20000
A	50.8	50.8	50.8	76.2	74.7	87.4	112.8
B	61.0	61.0	61.0	99.1	99.1	139.7	177.8
C	11.7	18.0	24.4	24.4	30.7	37.1	42.9
D _{max}	16.5	22.9	29.2	29.2	35.6	41.4	47.8
E (kg)	M8x1.25 - 6H	M12x1.75 - 6H		M20x1.5 - 6H		M24x2 - 6H	M30x2 - 6H
E (lbs)	¼ - 28UNF - 2B	½ - 20UNF - 2B		¾ - 16UNF - 2B		1 - 14UNF - 2B	1¼ - 12UNF - 2B
F	30.5	30.5	30.5	49.5	49.3	69.9	88.9
G	8.9	8.9	8.9	14.0	15.7	22.4	31.8

* 3Klb version has ½ - 20UNF - 2B tapped holes

**SPECIFICATIONS**

PARAMETER	VALUE		UNIT
Standard capacities (E_{max})	50, 100, 250, 500, 1000, 2500, 5000, 7500, 10000		kg
Standard capacities (E_{max})	50, 75, 100, 150, 200, 250, 300, 500, 750, 1K, 1.5K, 2K, 2.5K, 3K, 5K, 10K, 15K, 20K		lbs
Accuracy class per NTEP	NTEP III L	Non-Approved	
Maximum no. of verification intervals (n)	10000		mV/V
Rated output (=S)	3.0		mV/V
Rated output tolerance	0.0075		±mV/V
Zero balance	1.0		±% FSO
Combined error	0.0200	0.05	±% FSO
Non-repeatability	0.0100	0.0200	±% FSO
Minimum dead load output return	0.0500		±% applied load
Creep error (30 minutes)	-	0.0600	±% applied load
Creep error (20 minutes)	0.0030	0.0200	±% applied load
Temperature effect on min. dead load output	0.0090	0.0250	±% FSO/5°C
Temperature effect on sensitivity	0.0072	0.0250	±% applied load/5°C
Minimum dead load	0		% E_{max}
Maximum safe over load	150		% E_{max}
Ultimate over load	300		% E_{max}
Maximum safe side load	100		% E_{max}
Excitation voltage	5 to 12		V
Maximum excitation voltage	15		V
Input resistance	430±60		Ω
Output resistance	350±3.5		Ω
Insulation resistance	≥5000		MΩ
Compensated temperature range	-10 to +40		°C
Operating temperature range	-40 to +80		°C
Storage temperature range	-40 to +90		°C
Element material (DIN)	Nickel plated alloy steel		
Sealing (DIN 40.050 / EN60.529)	IP65		

FSO-Full Scale Output

VISHAY TRANSDUCERS (VT) SALES OFFICES

VT Americas
City of Industry, CA
PH: +1-626-858-8899
FAX: +1-626-332-3418
vt.us@vishaymg.com

VT Netherlands
Breda
PH: +31-76-548-0700
FAX: +31-76-541-2854
vt.nl@vishaymg.com

VMG UK
Basingstoke
PH: +44-125-646-2131
FAX: +44-125-647-1441
vt.uk@vishaymg.com

VMG Israel
Netanya
PH: +972-9-863-8888
FAX: +972-9-863-8800
vt.il@vishaymg.com

VMG Germany
Heilbronn
PH: +49-7131-3901-260
FAX: +49-7131-3901-2666
vt.de@vishaymg.com

VT China
Tianjin
PH: +86-22-2835-3503
FAX: +86-22-2835-7261
vt.prc@vishaymg.com

VMG France
Chartres
PH: +33-2-37-33-31-20
FAX: +33-2-37-33-31-29
vt.fr@vishaymg.com

VT Taiwan*
Taipei
PH: +886-2-2696-0168
FAX: +886-2-2696-4965
vt.roc@vishaymg.com
*Asia except China



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.